

## Nero Mini Surface

Round and square surface and suspended luminaires with a reflector diameter of only 43mm. Available with four different lenses. Thirty-two colour combinations available.



### Light Technique:

- Direct illumination provided by lens technology.
- Beam angle options of:
  - Narrow (14°)
  - Medium (24°)
  - Wide (60°)
  - Linear spread (20° x 66°) for linear installations such as corridors and walkways.
- Colour rendering index CRI > 80 or CRI > 90.
- Colour temperature 2700K, 3000K and 4000K.
- 50,000 hour lifetime (L80 B10).

### Luminaire Housing:


- Non deformable housing made of aluminium and UV-resistant plastic.
- Various paint finishes for front bezel and inner reflector:
  - White RAL 9010
  - Silver RAL 9006
  - Black RAL 9005
  - Textured gold
- Internal baffle can be white or black.

### Operating and Assembly Technology:

- Integral driver.
- Control protocol options include fixed output, phase dimming, DALI dimming and Bluetooth wireless.

### Luminaire Performance

- High efficacy when combined with white baffle. Up to 122 Llm/W.
- Black baffle offers optimal visual comfort.

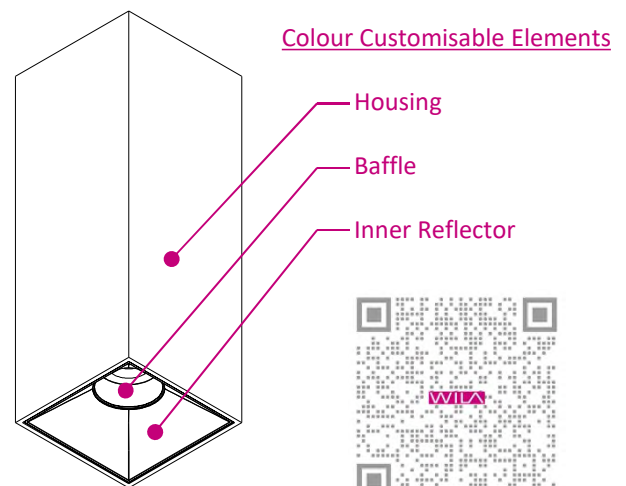

# Nero Mini Surface

Part Number Structure:

**NMS\* - \* \*\* \*\*\* - \* \* \* - \***

