


## Cleveredge Pro

Recessed square and linear LED luminaire for seamless installation into T-Grid ceiling systems. Cleveredge Pro can also be suspended or surface mounted, with use of mounting kits ordered separately.

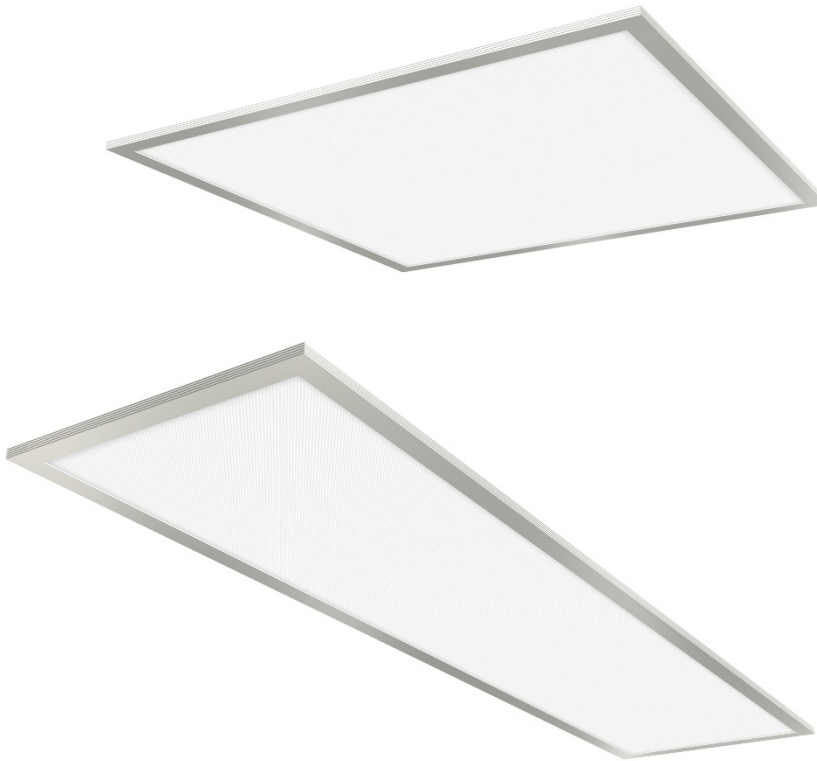

### Light Technique:

- Glare controlled Microprismatic optic or opal diffused version for circulation spaces where glare control is not critical.
- Colour rendering index CRI > 80.
- Colour temperature 3000K and 4000K.
- 50,000 hour lifetime (L80 B10).

### Luminaire Housing:

- Extruded aluminium housing.
- Finish in white RAL 9003.
- Ingress protection IP40.
- Impact rating IK04.
- Suspension kit and surface mounting frames available for pendant and surface installations.

### Operating and Assembly Technology:

- Supplied with remote driver.
- Electrical connection with plug-in terminal up to 2.5mm<sup>2</sup>.
- Control protocol options include fixed output, DALI and Bluetooth wireless.

### Luminaire Performance

- Excellent efficacy with opal diffused luminaires. Up to 116 lIm/W.
- DALI dimming range 1-100%.
- Flicker < 1%.



# Cleveredge Pro

Part Number Structure:

CEP - \* W \* - \*\*\* - \*

**Optic**  
Microprismatic  
Opal Diffused

M  
O

**Colour Temperature**  
3000K  
4000K

3  
4

**Dimensions**  
595x595mm  
620x620mm  
1195x295mm

595X595  
620X620  
1195X295

**Controls**  
Bluetooth (Wireless)  
DALI Dimmable  
Fixed Output

B  
D  
F

